




# RFID Module Series **FO-RF-10-1**

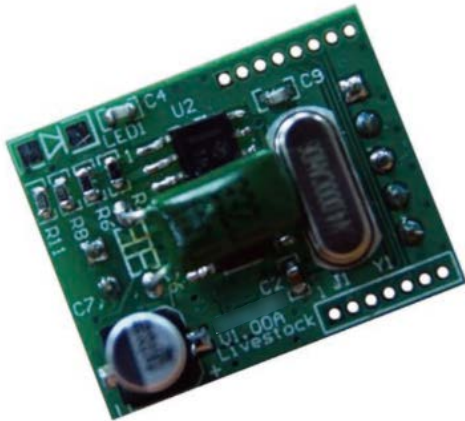

## Feature :

Low power consumption,  
under voltage, small volume,  
Easy to install

## Application :

Various machine integration,  
Auto-ID data collection

Transmit Frequency	134.2Hz
Supported Transponder	ISO 11784/11785
Operating Temperature	0°C to +70°C
Storage Temperature	-10°C to +85°C
Storage Humidity	5~97% non-condensing
Power Supply	DC 5V $\pm$ 5%
Power Consumption	Stand By : 11mA/ 50mA in Operating
Dimensions (L*W*H)	25mm*20mm*11mm
Weight	4g $\pm$ 1%
Communication Protocol	UART

First Optotech Company, Ltd.

TEL/FAX : (+886)-7-6011730

Mail : firstoptotech@gmail.com

Web Site : www.first-tech.com.tw