




# RFID Module Series **FO-RF-11-1**

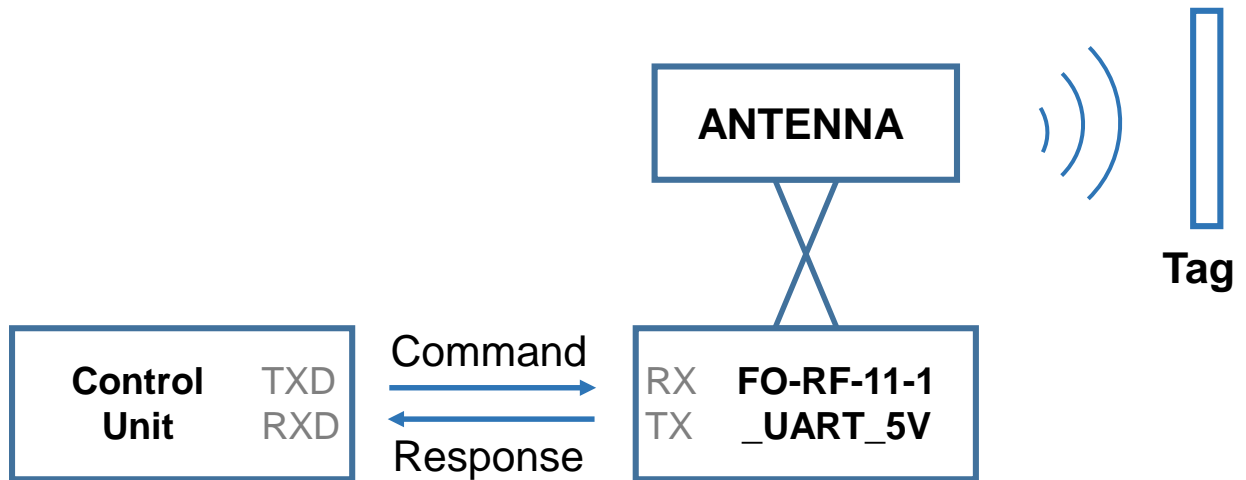

Transmit Frequency	125KHz
Supported Transponder	EM4102 · EM4200 (Manchester code)
Power Supply	DC 5V
Power Consumption	Operating: 70mA(max) Standby : 10mA
Communication Protocol	The Nation standard UART format
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Storage Humidity	5~97% non-condensing
Dimensions (L*W*H)	31mm*21.5mm*6.1mm
Weight	9g

First Optotech Company, Ltd.

TEL/FAX : (+886)-7-6011730

Mail : firstoptotech@gmail.com

Web Site : www.first-tech.com.tw